



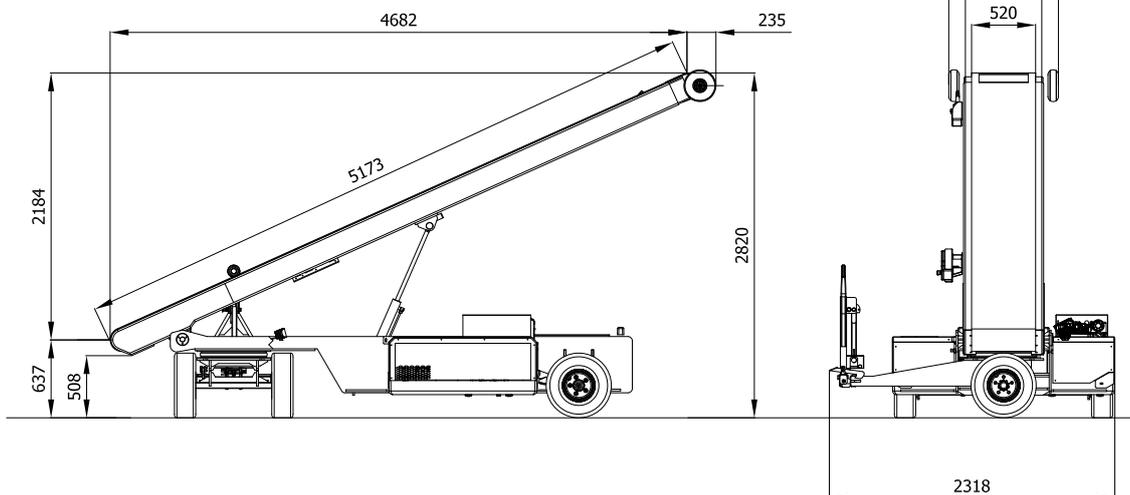

BELT LOADERS

With its range of towable and self-propelled baggage belt loaders, both diesel and electric, ATA covers the full range of requirements of those airports that demand reliable products, but also guaranteed operator safety

ATA offers superior quality products with a range of use up to 747 aircraft. You can choose from a vast range of options, such as rear lift, diesel or electric powered, integrated battery charger, or diesel engine.

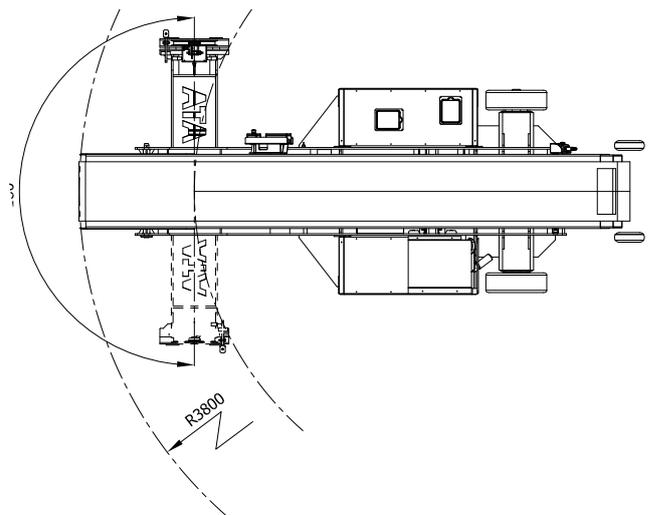

BELT LOADERS



CHARACTERISTICS	
MODEL	ACB2800 – TOWABLE
ALIMENTATION	DIESEL (OPTION ELECTRIC)
ENGINE	LOMBARDINI 12LD477/2 – 2 CYLINDER
NOMINAL POWER	16.8 KW @ 2800 RPM
MAX HEIGHT	2.800 MM (3.800 OPTIONAL)
BELT WIDTH	600 MM
SIDE REMOVABLE PROTECTION	OPTIONAL ON DEMAND
BELT SPEED	ADJUSTABLE
MAX BELT SPEED	48 M/MIN.
ELECTRIC PLANT	12VDC
WEIGHT	2400 KG
TRASLACTION	HYDROSTATIC FROM THE TOW BAR
TOWBAR EYE	Ø40 DIN 74054
PARKING BRAKE	MECHANIC
NUMBER OF BRAKING AXLES	1
WHEELS TYPE	PNEUMATIC SUPERELASTIC (OPTIONAL)
WHEELS	2 FRONT (6.00-9") 2 REAR (6.00-9")
CE CONFORMITY	DIR. 2006/42/CE ("DIRECTIVE ON MACHINERY") DIR. 2004/108/CE IATA AHM 925

SELF PROPELLED (DIESEL - ELECTRIC)

