Vacuum Stone Lifter
serie P2A

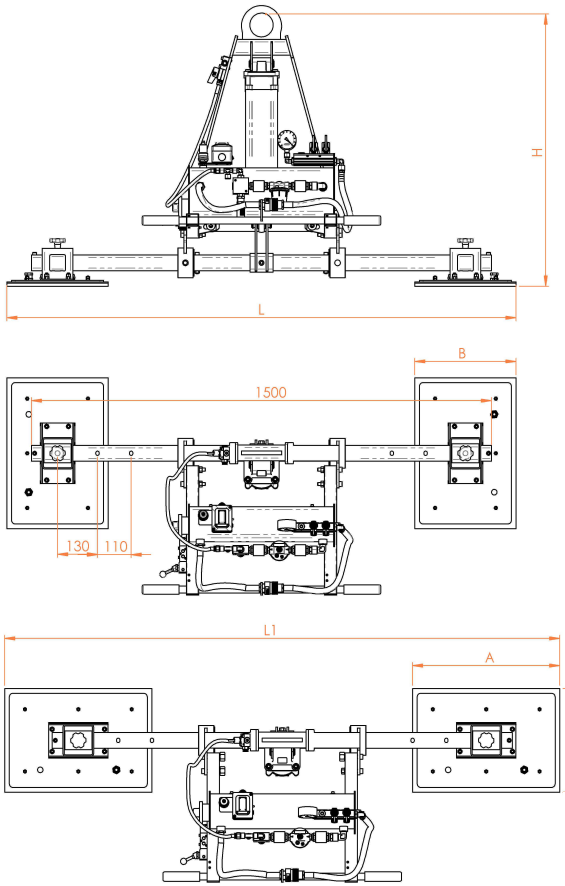

SILCOMNORTH UAB
www.silcomnorth.com
hello@silcomnorth.com
Phone +370 67216691
Antakalnio g. 17, Vilnius 10312, Lithuania

Technical specification

Application	Not porous stones
Lifting capacity	Up to 1500 kg
Suction pads	No. 2 rectangular suction pads
Load movement	0-90° pneumatic tilt by pneumatic cylinder/s
Operating system	Compressed air
Vacuum system	Vacuum circuit, complete of vacuum reserve and non return valve
Weight of lifter	Depends on the configuration
Control	Manual valve on the lifter's frame release of the load by dual action security command
Standard features	On-off double sliding valve with safety Audible and visual low vacuum warning devices Vacuum gauge with colored scale

- **compressed air operating system**
- 2 suction pads
- **pneumatic 90° tilt**
- lifting capacity up to 1.500 kg
- low vacuum warning device

Available models

Product code	Lifting capacity	A	B	H
P2A 250	250	480	230	840
P2A 500	500	480	330	840
P2A 1000	1000	630	430	920
P2A 1500	1500	830	480	940

CE
MADE IN ITALY