

## Vacuum glass lifter

Model

### VB4 RCEBE PRO

Kg max  
400

Power supply  
Batteries



The VB4 RCEBE PRO is a version of the standard VB4 vacuum glass lifter completed with four **extension arms** for bigger pad spread. Thanks to its extension arms, this lifter can reach **four different configurations**.

The four suction cups can be put **in in-line position** and allow the lifter to handle long and narrow glass. Vacuum glass lifter VB4 RCEBE is **powered by rechargeable batteries** that, if necessary, may be easily removed and quickly replaced.

The VB4 RCEBE vacuum lifter features **electric tilt and electric 360 degree rotation**. VB4 is specific vacuum glass lifter for construction site use with **dual vacuum circuit** according to EN13155.

The same model is also available with vacuum pads d. 390 mm and 600kg capacity (mod. VB4RCEBE d4 PRO).



Electric tilt 0-90°



Electric continuous rotation 360°



Max capacity 400kg



4 vacuum pads d.310 mm



Safety devices




4 possible configurations

CE

made in  
ITALY

## Vacuum glass lifter

### Technical drawing

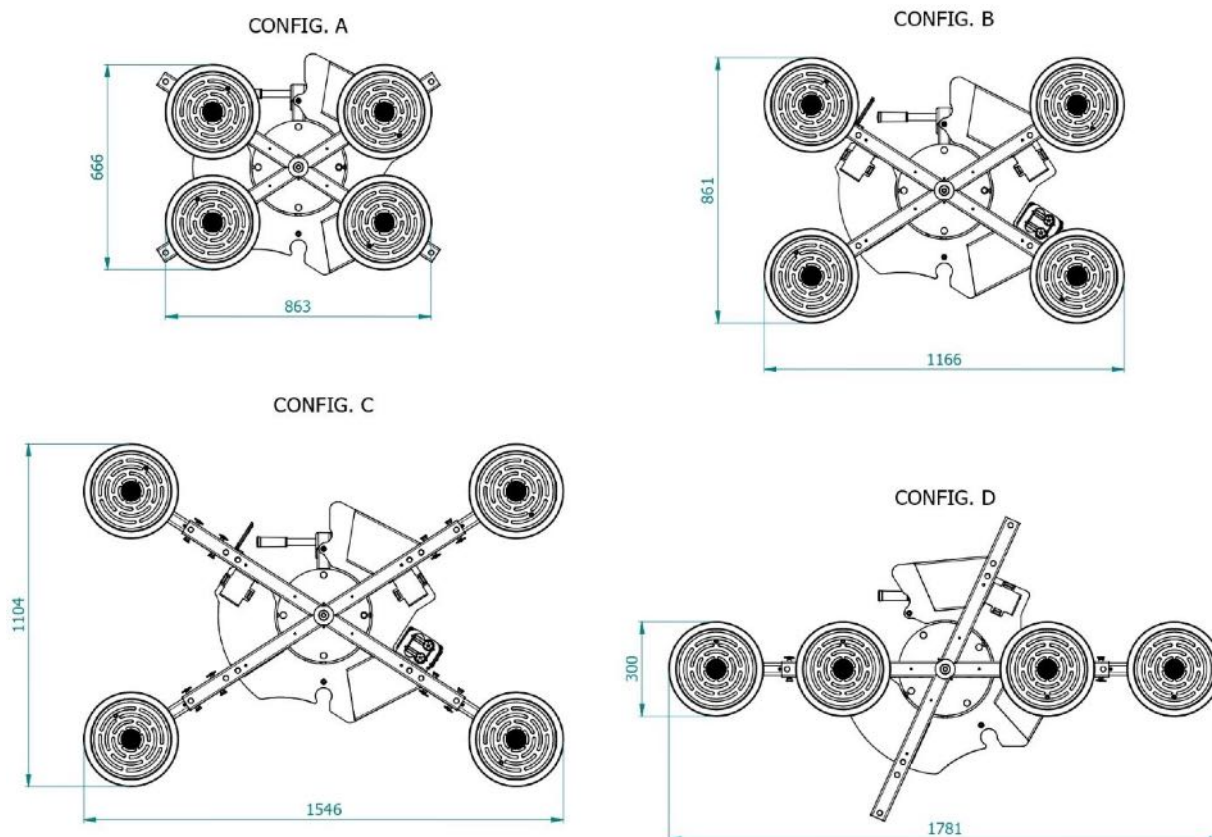

### Technical specification

<b>Application</b>	Glass panels
<b>Lifting capacity</b>	Max 400 kg
<b>Suction pads</b>	No. 4 round suction pads diameter 390 mm Lipped pads with safety ring
<b>Pad spread</b>	A mm 863x666 B mm 1166x861 C mm 1546x1104 D mm 1781x310
<b>Load movement</b>	Continuous 360 degrees powered rotation 90 degrees powered tilt
<b>Operating system</b>	DC vacuum pump powered from on-board batteries High capacity re-chargeable batteries Battery status indicator Economizer for reduction of the energy consumption
<b>Vacuum system</b>	2 independent vacuum circuits, each vacuum circuit with vacuum reserve and non return valve
<b>Weight of lifter</b>	Kg 140
<b>Structural depth</b>	mm 614
<b>Control</b>	Radio remote control Release of the load by dual action security command
<b>Standard features</b>	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit; vacuum filter Battery charger 240 Volt Multi position hook connection