


Vacuum glass lifter

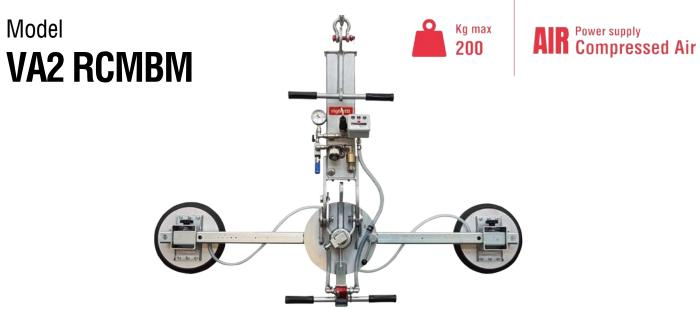

The model VA2 RCMBM is a **vacuum glass lifter specific for indoor use**, with two suction pads d. 310 mm, compressed air powered with lifting capacity up to 200Kg. The pads are replaceable along the arms in different positions.

The lifter features **manual 360**° **rotation and manual 0 – 90**° **tilt**. It is equipped with an audio-visual alarm unit that warns the operator of possible dangerous situations. The vacuum gauge with coloured scale allows constant control of the vacuum level reached. It features a **filtering system** for dust and condensation. The central beam is long mm 1500 as standard, on request we can build it in different lengths.

This model is also available with suction pads d. 390 mm and lifting capacity 300kg (VA2 RCMBM d4).

Technical specification

Application	Glass panels
Lifting capacity	Max 200 kg
	ů .
Suction pads	No. 2 round suction pads diameter 310 mm
	Lipped pads with safety ring
Pad spread	Various pads configurations
	Max mm 1660x310 Min 810x310
Load movement	360° manual rotation
	90° manual tilt
Operating system	Compressed air
Vacuum system	Single vacuum circuit with vacuum reserve
	and non-return valve
Weight of lifter	Kg 57
Control	Manual on-off valve on the lifter's frame
	Release of the load by dual action security command
Standard features	Audible and visual low vacuum warning devices
	Vacuum gauge, Vacuum filter,
	Adjustable pads position

